

Magnasphere Panic Switch Kits: **MK-3045T & MK-3045L** for MSS-10CL/CT Series






Required Tools and Components

Provided by Manufacturer (per module set)


- 1x 3045 T or L Panic Switch
- 1x #6 - 5/8" [15.9mm] L - Self Tapping Screw
- 1x #6 1-1/4" [31.8mm] L - Self Tapping Screw

Provided by Installer

- Power Drill
- #32 Drill Bit
- Phillips Screwdriver

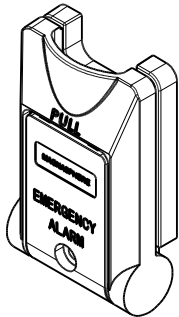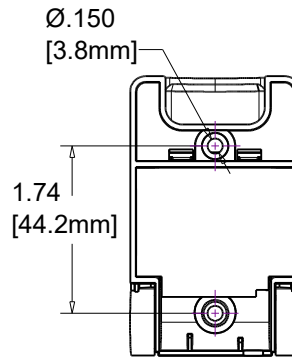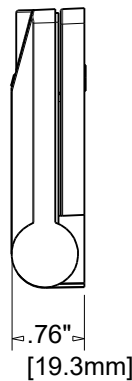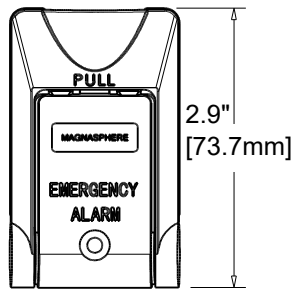

Normal State / Non-Alarm

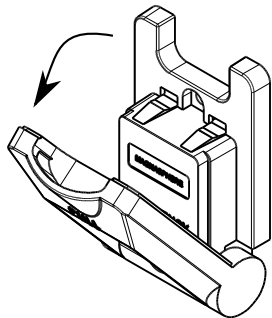


Alarm State

Specifications


- Max Current: 0.25A Resistive
- Max Voltage: 30 VDC
- Max Power: .25 W Resistive
- Configuration: "Closed Loop" w/ Target Magnet in Place
- Conductor: Screw Terminals or 2x 12" [30.5cm] 22AWG Leads
- Color: White
- Housing: ABS

NOMENCLATURE
 2x 22AWG Leads
 MK-3045 - T or L
 Screw Terminals

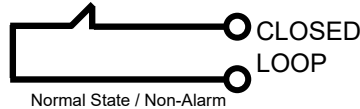


Application Note(s):

1. For cold room/refrigerator installs MK-3045L (with leads) should be used, also a soldered and shrink wrapped connection is recommended.

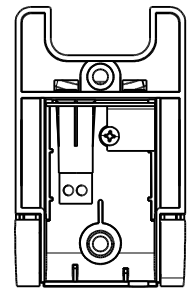

MK-3045T with Screw Terminals

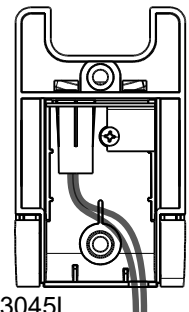

MK-3045L with 2x 22AWG 12"L Leads