


LED Indicator Lights

Narrow Stile, Robust, Convenient


GEM **TLM-200 LED** indicator lights can be compatible with any access control systems. The red and green LED indicator provide visual confirmation when the door is locked or unlocked. They operate on 12/24 VDC and can be either mortise or surface mounted.




TLM-200



With Jumper, the LED light remains in steady mode




Without Jumper, the LED light remains in flashing mode.

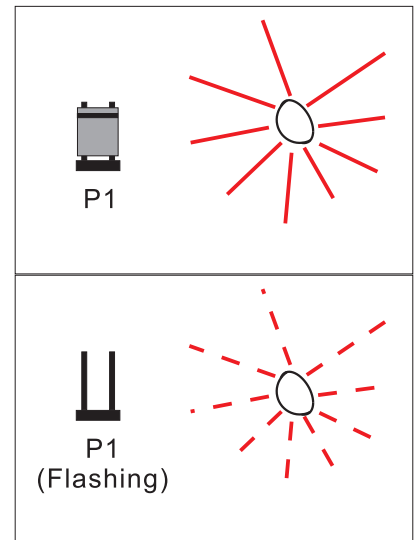

TLM-200 Door Status Indicator

12~24VDC
12VDC Holding: 20mA Pull In: 50mA
24VDC Holding: 20mA Pull In: 80mA

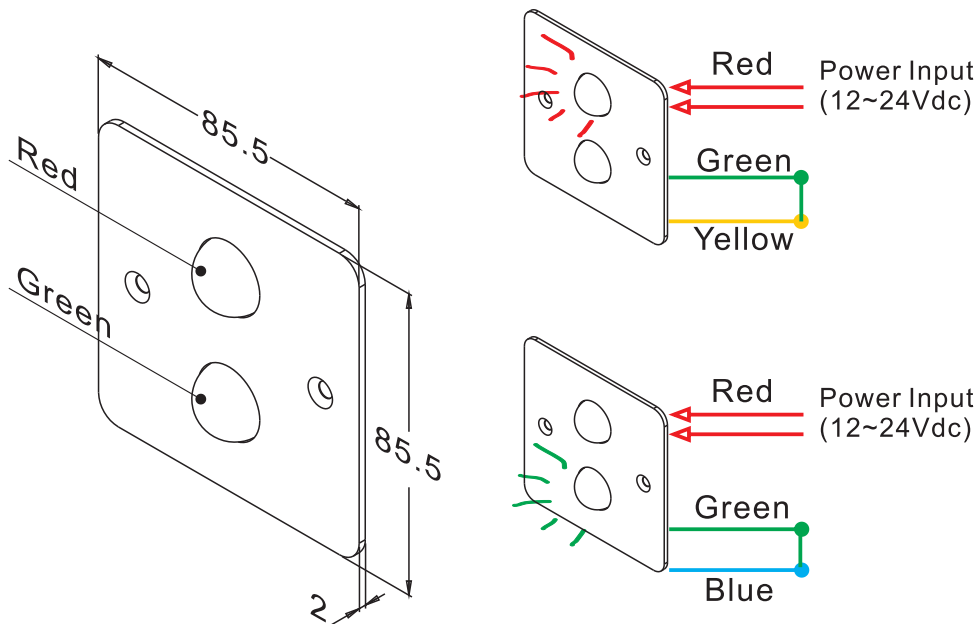


TLM Series LED Indicator Lights

Models	Voltage (VDC)	Push Button	2 Bulbs (Red & Green)	Mount	Faceplate Construction
Narrow size					
<u>TLM-100</u> <u>TLM-100MTS</u>	12-24	—	●	<u>Surface</u> Flush	Stainless steel
<u>TLM-300</u> <u>TLM-300S</u>	12/24	●	●	<u>Flush</u> Surface	Zinc alloy
<u>TLM-400</u> <u>TLM-400S</u>	12/24	—	●	<u>Flush</u> Surface	Zinc alloy
<u>TLM-600-4</u> <u>TLM-600-S-4</u>	12/24	●	●	<u>Flush</u> Surface	Stainless steel
<u>TLM-600N</u> <u>TLM-600NS</u>	12/24	—	●	<u>Flush</u> Surface	Stainless steel
European size					
TLM-200	12-24	—	●	Flush or Surface	Stainless steel


Dimensions

All dimensions in mm


TLM-400S

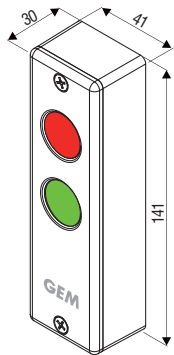


TLM-300S

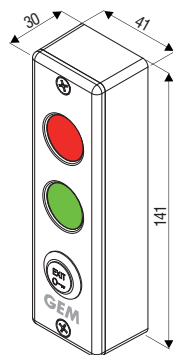


TLM-100MTS

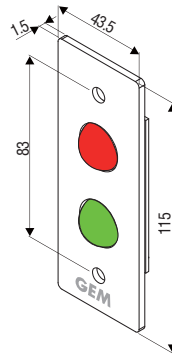


TLM-100

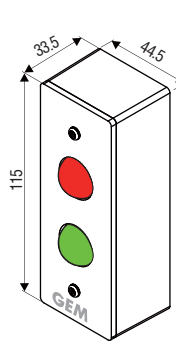


TLM-200

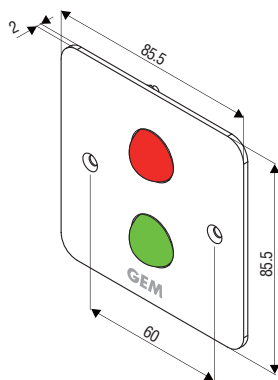

TLM-600N

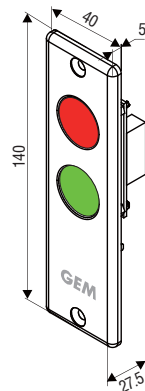

TLM-600-4

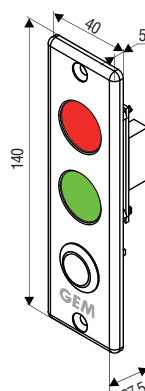

Optional Back Boxes


SMB-040

115x43x32mm



SMB-86AU-03

85.5x85.5x38mm



Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original customer. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.