

BS-MC424M – Roller Shutter Contact

Model No.: BS-MC424M Zinc Alloy Magnetic Contact

Specification

Mount Type: Surface Mount with Screws

Contact Type: N.O. (when the door is open, it is N.O.; when the door is closed, it is N.C.)

Contact Capacity: max: 0.5A, 200VDC, 10W

Magnet: Neodymium


Operation Gap: 50-60mm

Housing: Zinc Alloy

Recommend Installation Place: for steel door use

Lead Wire: 22AWG (0.18m²), 40mm, Brown and White, with Stainless Steel Cable Protection

Size (L*W*H): 105.7*50*50mm

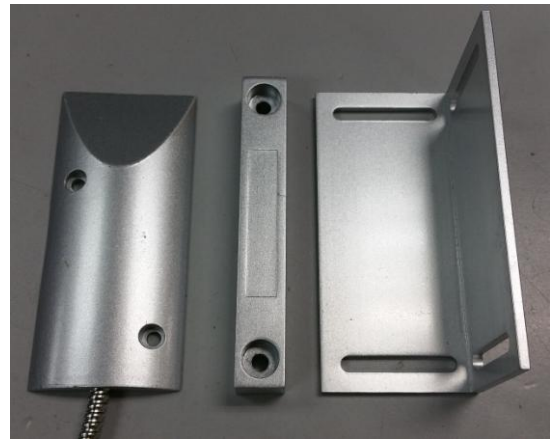

BS-MC115 – Overhead Roller Shutter Contact

Model No.: BS-MC115 Plastic Magnetic Switches

Specification

Operating distance: 40±10mm

Switch withstood-voltage: 100VDC

Load current: 500mA

Life time: 1,000,000 times

Switch output: NC

Applies to rolling door, high sensitivity, easily mounted

