

Premium LED CCTV Monitor



DESCRIPTION

The Auspice Star LCD w/ LED BLU (backlight unit) high brightness displays are a truly professional experience in next generation technology using eco-friendly material (no mercury or halogen). This technology exceeds the NTSC color gamut standard of 100% with the LED BLU at 123% to provide a wider range of colours than ever before - you will see colors on screen as you see them in real world.



SPECIAL FEATURES


- 1920 x 1080 Full HD Resolution
- 16:9 Ideal for IP Surveillance display
- 3D comb filter high quality motion adaptive
- 3D De-interlace ; 3D Decoder ; 3D Noise reduction
- Auto Power Recovery
- 10000 : 1 Contrast Ratio, 300 cd/m2
- Built-in Speaker
- User friendly OSD interface
- Looping Function
- PIP / PBP Multi Display Function

Specifications

CCTV LED SERIES	A215C2-LED	A236C2-LED
Display		
Screen Size	21.5"	23.6"
Max Resolution	FULL HD 1920 x 1080 620 TV Lines	FULL HD 1920 x 1080 620 TV Lines
Brightness	300cd/m ²	300cd/m ²
Pixel Type	Active Matrix TFT	Active Matrix TFT
Pixel Pitch	0.24825(H) x 0.24825(V)	0.2715(H) x 0.2715(V)
Display Color	16.7 Million	16.7 Million
Backlit	LED	LED
Contrast Ratio	10000:1	10000:1
Aspect Ratio	16 : 9	16 : 9
Viewing Angle (H/V)	160° / 170°	160° / 160°
Response Time	<5ms	<5ms
Video System	NTSC/PAL	NTSC/PAL
Interface		
Video In/Out (BNC Type)	2/2	2/2
VGA In/Out (15Pin D-Sub)	1	1
HDMI In	1	1
Video Audio (2 channels RCA input)	YES	YES
Audio Input PC Audio	1	1
Audio		
Built In speaker	Yes (1.5W x 2)	Yes (1.5W x 2)
Transmitter		
Remote Controller	Yes	Yes
Special Features		
3D Comb Filter		YES
3D De-Interlace		YES
Noise reduction		YES
PIP / POP		Analog / Digital
Multi-Language	English · German · French · Italian · Spanish · Russia · Turkish · Japanese · Polish	
Key Lock Function		YES
Dimension		
Net (WxHxD)	524x375x170(mm)	580x407x170(mm)
Weight	N.W.: 3.6kgs G.W.: 5kgs	N.W.: 4.4kgs G.W.: 6kgs
Environmental Conditions		
Operating Temperature		32° to 104° F [0° to 40° C]
Storage temperature		14° to 140° F [-10° to 60° C]
Operating Humidity		20% to 85% ; 10% to 90% relative, non-condensing
Cabinet		
Finish/Tilt Stand		Black/Yes
Mount		
Vesa Mounts Size		100mm x 100mm
Power		
Electrical Ratings		DC12V AC100-240 [50 / 60]
Consumption < On	30W Max	35W Max
Regulations	FCC-DOC, CE, ROHS	FCC-DOC, CE, ROHS

* Design and Specs are subject to change without any notice

Physical Layout

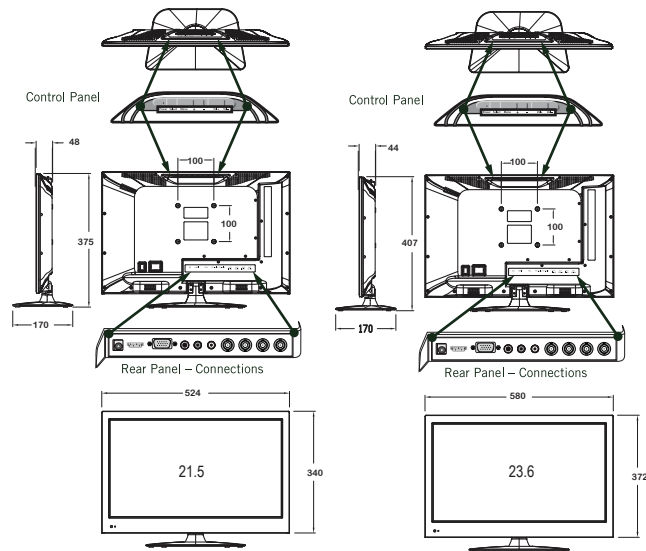

Input / Output

