

TVT

Secure The World With You

www.tvt.net.cn



TD-9568E2

6 MP Network IR Water-proof
Fisheye Camera

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057


Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn

6MP Network IR Water-proof Fisheye Camera

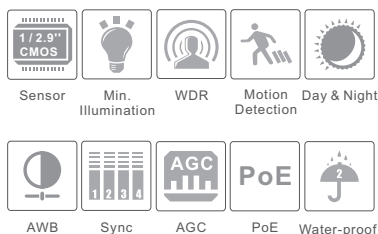


Features

- 6MP (2160 × 2160) H.265 full real time coding
- Max. resolution: 2160 × 2160
- ICR auto switch, true day / night
- 20~30 m IR night view distance
- 3D DNR, digital WDR
- Support HLC and BLC
- ROI coding
- Support scalable video coding technology
- Support local CVBS video output and two-way audio
- Support hardware reset
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

Dimensions

Unit : mm

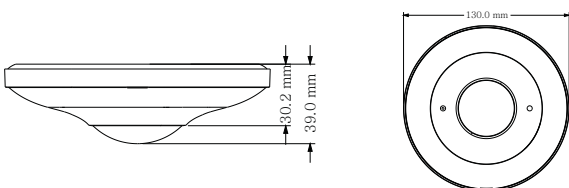

Available Accessories

Available Model	TD-9568E2 (D / PE / AR2)
-----------------	----------------------------

Specifications

Specifications	Model	TD-9568E2
Camera		
Image Sensor		1 / 2.9 "CMOS
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Lens		1.07mm @F2.5, horizontal field of view : 180° (wall mounting) 360° (ceiling mounting)
Day & Night		ICR
WDR		Digital WDR
BLC		Yes
Digital NR		2D / 3D
Slow Shutter		Yes
Compression Standard		
Video Compression		H.265 / H.264 / MJPEG
Encoding Type		VBR (five levels adjustable)/CBR
Smart Encoding		Support low bitrate, low delay; support ROI coding & SVC technology; support self-adaptive transmission bitrate as the network environment
Video Bit Rate		64 Kbps ~ 16MKbps
Audio Compression		G.711A /G. 711Mu
Audio Bit Rate		8Kbps ~ 48 Kbps
Image		
Main Stream Max. Frame Rate		① Fisheye+panorama+3 PTZ 50Hz: 25fps@(2160 × 2160/1920×1920/1440×1440), 25fps@(1920 × 1080), 25fps@(960× 540)*3 60Hz: 30fps@(2160 × 2160/1920×1920/1440×1440), 30fps@(1920 × 1080), 30fps@(960× 540)*3 ② Fisheye+ 4 PTZ 50Hz: 25fps@(2160 × 2160/1920×1920/1440×1440), 25fps@(960× 540)*4 60Hz: 30fps@(2160 × 2160/1920×1920/1440×1440), 30fps@(960× 540)*4
Max. Image Size		2160 * 2160
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Interfaces		
Network		RJ45
Video Output		CVBS video output (BNC × 1)
Audio		MIC IN × 1, MIC OUT × 1
Storage Card		Support TF card, up to 128GB
RS485		Yes
Alarm		1 CH alarm input; 1 CH alarm output
Functions		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T/28181-2011
Storage		TF card local storage, network remote storage
Smart Alarm		Motion alarm, sensor alarm
PoE		Yes
IR Distance		20~30 m
Water-proof		IP66
Others		
Power Supply		DC 12V / PoE
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity
Power Consumption		<12W
Dimensions (mm)		Φ 39 × 130
Weight (net)		432g
Installation		Wall mounting, pendent mounting